


## Микродастурни yangilash bo'yicha ko'rsatmalar X-COP 9700s Wi-Fi Black


1. neoline.ru saytiga kiring va "Yangilanishlar" bo'limida so'nggi proshivkani yuklab oling

<https://neoline.ru/obnovleniya/>

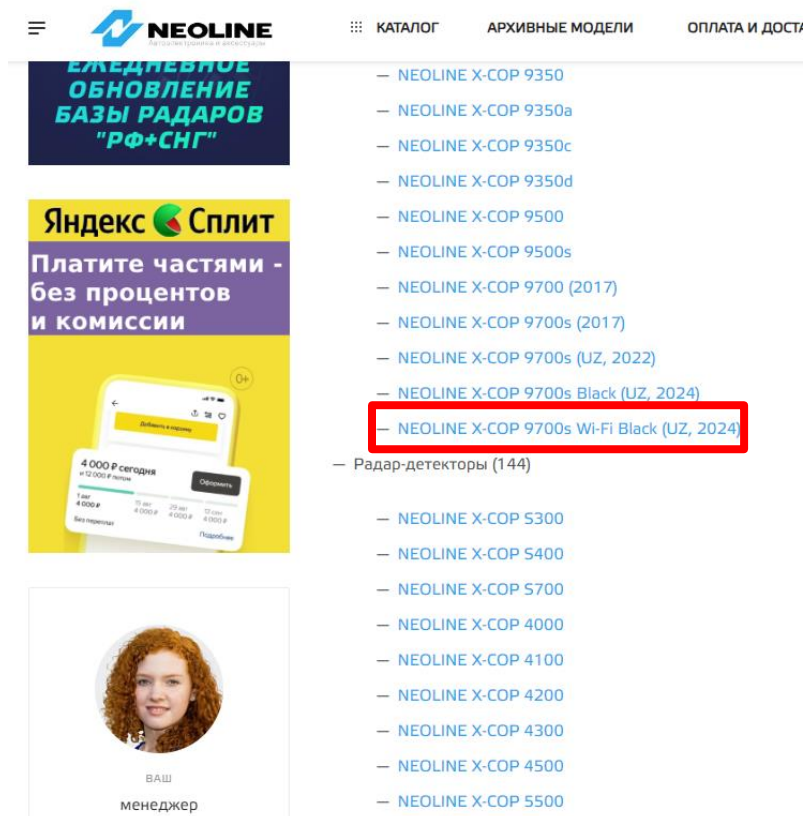

The screenshot shows the website interface with a list of firmware models. The model "NEOLINE X-COP 9700s Wi-Fi Black (UZ, 2024)" is highlighted with a red box. Other models listed include X-COP 9350, X-COP 9500, and X-COP 9700 (2017).


2. Arxiv tarkibini siz uchun qulay papkaga yoki ish stolingizga chiqarib oling: yuklab olingan arxivni oching, "Extract ..." tugmasini bosib.

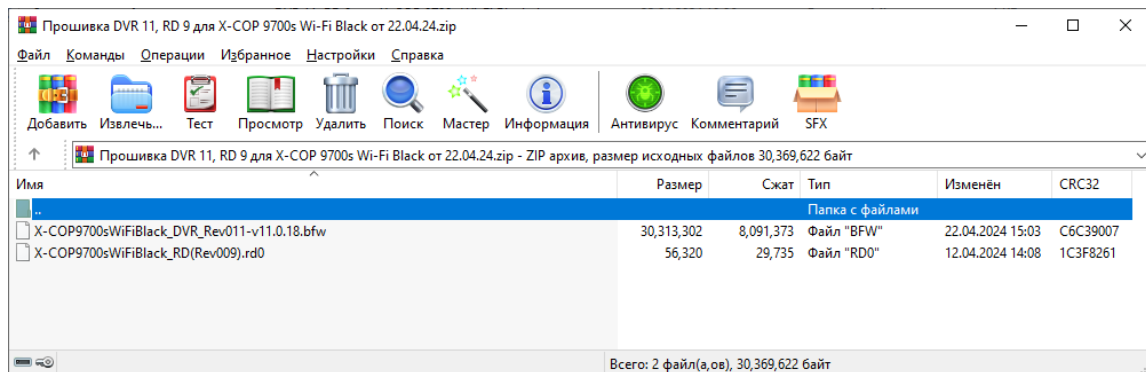



The screenshot shows a Windows File Explorer window titled "Прошивка DVR 11, RD 9 для X-COP 9700s Wi-Fi Black от 22.04.24.zip". The window displays the contents of the ZIP archive, including a folder "Папка с файлами" and two files: "X-COP9700sWi-FiBlack\_DVR\_Rev011-v11.0.18.bfw" and "X-COP9700sWi-FiBlack\_RD(Rev009).rd0".

Имя	Размер	Сжат	Тип	Изменён	CRC32
Папка с файлами					
X-COP9700sWi-FiBlack_DVR_Rev011-v11.0.18.bfw	30,313,302	8,091,373	Файл "BFW"	22.04.2024 15:03	C6C39007
X-COP9700sWi-FiBlack_RD(Rev009).rd0	56,320	29,735	Файл "RD0"	12.04.2024 14:08	1C3F8261

3. Oynaning o'ng tomonidagi "Ish stoli" ni bosing, so'ng "OK" tugmasini bosing.

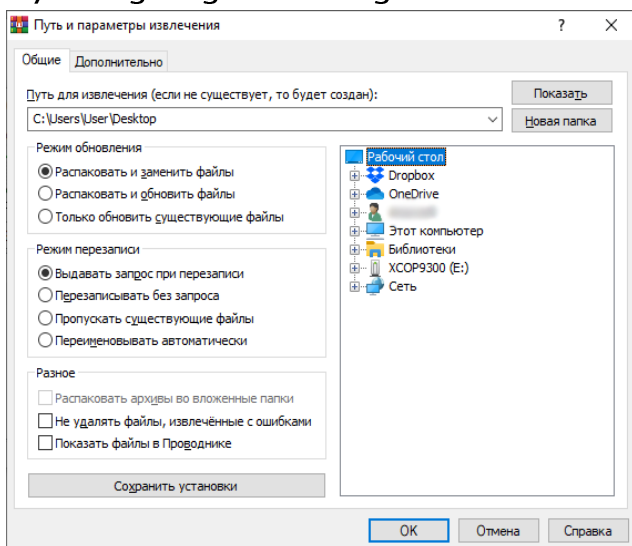

4. Xotira kartasini formatlang ("Fat32" fayl tizimidan foydalaning).

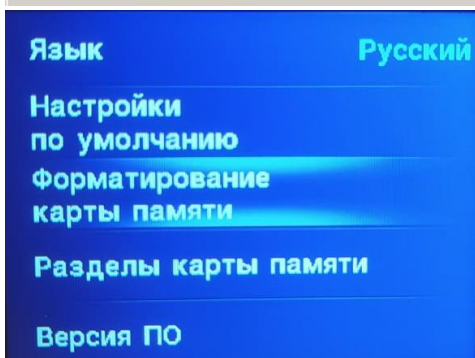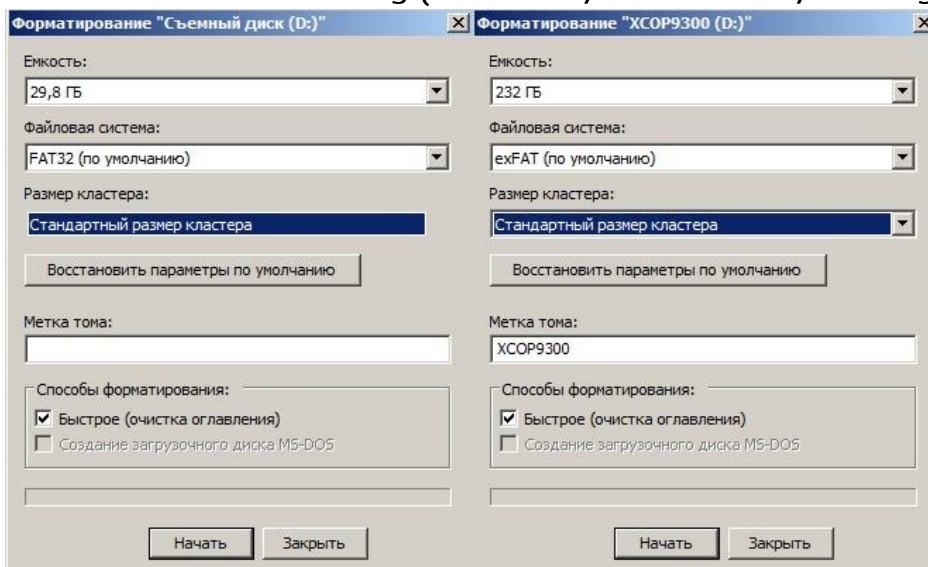



**NEOLINE**

Автоэлектроника и аксессуары

texnik yordam xizmati  
support@88003509609.com  
<https://uz.neoline.com/>

5. Barcha fayllarni xotira kartasiga nusxa ko'chiring:  
X-COP9700sWiFiBlack\_DVR\_Rev011-v11.0.18.bfw  
X-COP9700sWiFiBlack\_RD(Rev009).rd0

**OGOHLANTIRISH: fayllar nomlarini o'zgartirmang.**

6. Xotira kartasini X-COP 9700s Black-ga joylashtiring va qurilmani avtomobil rozetkasiga ulang. X-COP 9700s Black avtomatik ravishda yoqiladi.
7. Qurilma menyusiga kiring, "yangilash" bandini tanlang va "OK" tugmasini bosib, "OK" tugmasini yana bir marta bosish orqali proshivka yangilanishini tasdiqlang.

**DIQQAT: yangilash vaqtida kontakti o'chirmang va qurilmadagi tugmalarni bosmang - bu yangilash jarayonida xatolikka va qurilmaning ishlamay qolishiga olib kelishi mumkin.**

8. Yangilanish tugagandan so'ng, qurilma avtomatik ravishda qayta yoqiladi. Proshivka fayllari qurilma xotirasiga yoziladi va xotira kartasidan avtomatik ravishda o'chiriladi.
9. Sozlamalarni qurilma menyusini orqali qayta o'rnating va keyin uni o'zingizning xohishingizga ko'ra sozlang.  
Qurilma ishlashga tayyor.



**NEOLINE**

Автоэлектроника и аксессуары

texnik yordam xizmati  
support@88003509609.com  
<https://uz.neoline.com/>

## **DVR 11 dasturiy ta'minotidagi o'zgarishlar**

1. Qurilmaning barqarorligi yaxshilandi.  
*Mikrodastur o'rnatgandan so'ng, u avtomatik ravishda standart sozlamalarga qaytariladi. Qurilma shaxsiy imtiyozlarga ko'ra qayta sozlanishi kerak.*